

MORSØ - UPAKS

Frame Assembling Machine

Automatic, pneumatic,
operated by a dual hand release system for maximum
operator safety

Floor Model


Ideal machine for frame assembling

- ▼ Dual hand operation for maximum operator safety
- ▼ Built in compressor
- ▼ Exact 45° assembling
- ▼ No noise

MORSØ-UPAKS is an automatic, pneumatic floor model with built in compressor. It is operated by a dual hand release system and a pneumatic foot pedal for clamping the frames.

Therefore the **MORSØ-UPAKS** is 100 % safe to operate. In order to get the **MORSØ-UPAKS** operating just connect two mains. The compressor has been built into the machine frame. The **MORSØ-UPAKS** has built in extension arms for supporting long mouldings.

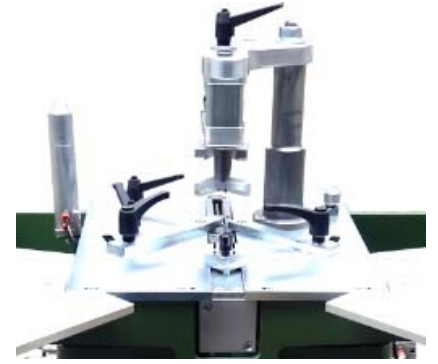


MORSØ - UPAKS

Frame Assembling Machine

Automatic - Pneumatic

TECHNICAL DATA
SUBJECT

Air pressure
 Wedge size
 Thickness of moulding, min.
 Thickness of moulding, max.
 Width of moulding, min.
 Width of moulding, max.
 Distance between wedges, max
 Height, working bench

Machine dimension: Length x width x height
 Weight

Compressor 75/150

Voltage
 Output
 Capacity
 Air pressure, max.

Stand dimensions:

Min. height
 Max. height
 Width

Shelves

Width x length

SPECIFICATION

6 - 8 bar
 5, 7, 10 and 12 mm
 6 mm (¼")
 65 mm (2 ½")
 6 mm (¼")
 150 mm (6")
 130 mm (5")
 272 mm (11")
 575x330x490 mm (22x13x19")
 95 kilos (209 lbs)

220/110 V
 78 l/min.
 15 litres
 8 bar

570 mm (22")
 800 mm (31")
 500 mm (20")
 2
 150x320 mm (6x13")

The main features of the MORSØ UPAKS are:

- Floor model, with built in compressor
- Operated by a dual hand release system ensuring maximum operator safety.
- Noiseless operation
- Exact 45° assembling
- Built to last

The Morsø UPAKS is delivered with:

- Two adjustable stops for min. and max. wedge position.
- Single pressure pad for plain mouldings
- Two double pressure pad for mouldings with different profiles
- Frontal clamp device holding the corners tightly together to create a perfect joint
- Adjustable fences for all angles, i.e. rectangular, hexagonal and octagonal frames
- Built in supports arms for long mouldings
- Two refillable solid-steel cartridges for 7 and 10 mm wedges.
- Air filter
- Oil lubricator
- Stand, adjustable in height
- Compressor
- Shelves
- 1 box of 7 mm wedges (5000 pcs)
- 1 box of 10 mm wedges (2700 pcs)

ACCESSORIES:

- 5 mm steel cartridge
- 12 mm steel cartridge
- 5 mm wedges – 1 box 5000 pcs
- 12 mm wedges – 1 box 5400 pcs

Double pressure pads:

One for mouldings with standard profile and one for mouldings with reversed profile.

Padded with synthetic fibres ensuring no marks at all are left on the frame.


Flat pressure pad for plain mouldings.

Padded with synthetic fibres ensuring no marks at all are left on the frame.


Solid steel cartridges:

5, 7, 10, and 12 mm.


MODELS

MORSØ - UPH

MORSØ - UPM

MORSØ - UPA

DISTRIBUTOR
